





APE TOP DRIVE AUGER 100BB

DEEP FOUNDATION SOLUTIONS

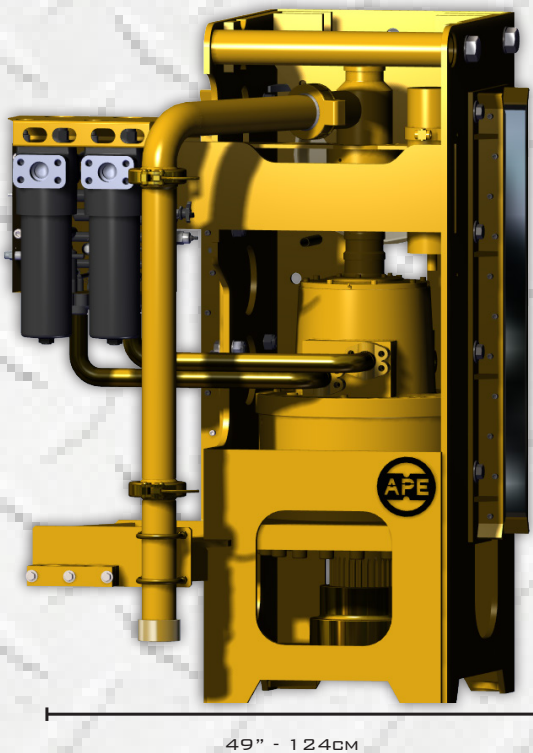

49" - 124cm

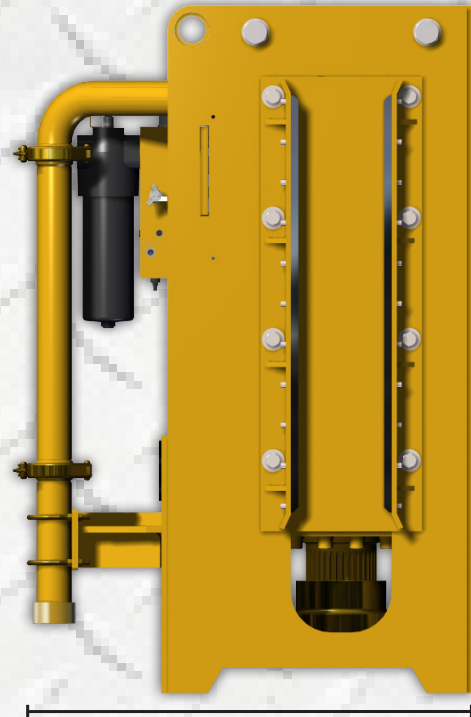

44" - 112cm

68" - 173cm

SPECIFICATION		STANDARD	METRIC
Low Speed High Torque	Torque	18,218 ft-lbs per 1000 psi	2,519 kgm per 69 bar
	Max Pressure	5,500 psi	379 bar
	Rotation Speed	25 rpm	
	Max Flow	150 gpm @ 6 gal / rev	568 lpm @ 22.5 lit / rev
	Max Horse Power	437 hp	326 kW
High Speed Low Torque	Torque	9,109 ft-lbs per 1000 psi	1,259 kgm per 69 bar
	Max Pressure	5,000 psi	345 bar
	Rotation Speed	50 rpm	
	Max Flow	150 gpm @ 3 gal / rev	568 lpm @ 11.25 lit / rev
	Max Horse Power	437 hp	326 kW
Suspended Weight		5,630 lb	2,554 kg
ID of Output Shaft		3"	76.2 mm
ID of Rotary Joint		3"	76.2 mm
API Adapters		3", 4"	
Lead Adapters		Up to 54" Leader	



800-248-8498

WWW.AMERICANPILEDRIVING.COM

VISIT US



**MOBILE APP
NOW AVAILABLE**



Copyright © 2020 American Piledriving Equipment Inc. All Rights Reserved