




APE TOP DRIVE AUGER 100BB

DEEP FOUNDATION SOLUTIONS

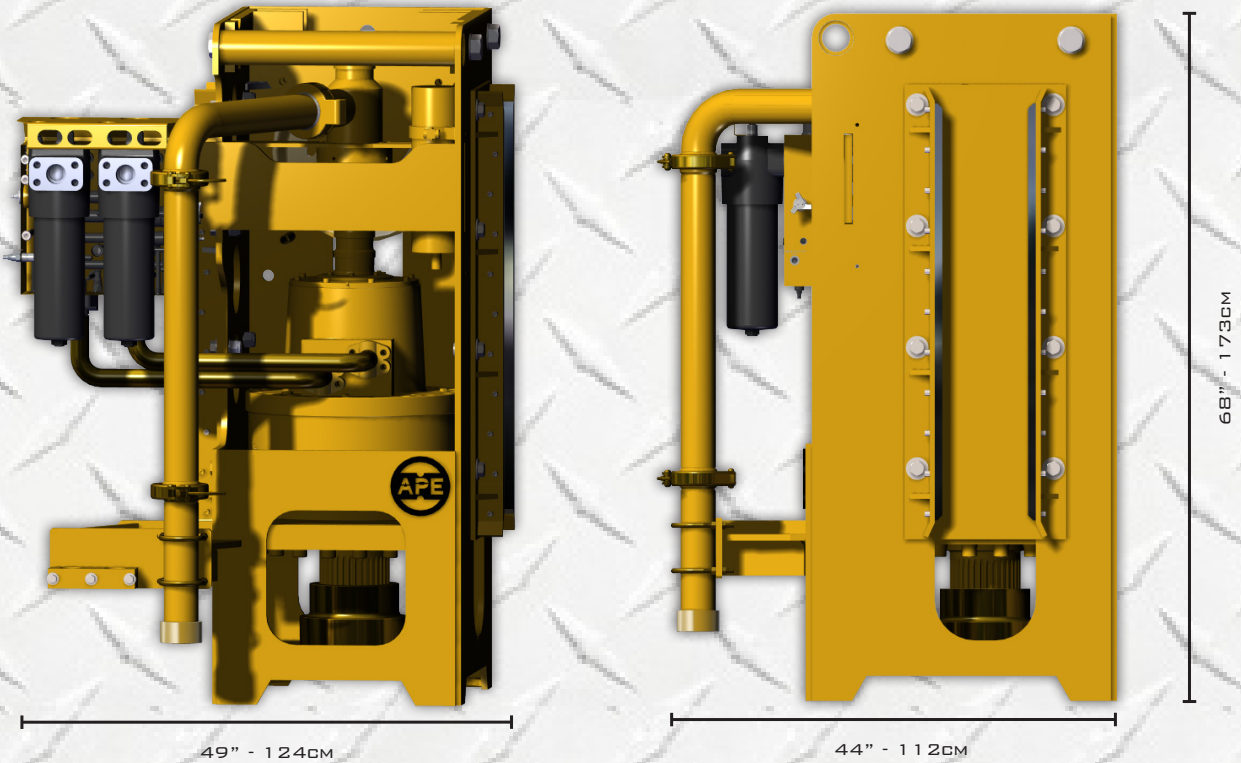

SPECIFICATION		STANDARD	METRIC
Low Speed High Torque	Torque	18,182 ft-lbs per 1000 psi	2,514 kgm per 69 bar
	Max Pressure	5,500 psi	379 bar
	Rotation Speed	30 rpm	
	Max Flow	140 gpm @ 5 gal / rev	530 lpm @ 18.93 lit / rev
	Max Horse Power	401 hp	299 kW
High Speed Low Torque	Torque	7,266 ft-lbs per 1000 psi	1,005 kgm per 69 bar
	Max Pressure	4,500 psi	310 bar
	Rotation Speed	61 rpm	
	Max Flow	140 gpm @ 2.5 gal / rev	530 lpm @ 9.46 lit / rev
	Max Horse Power	465 hp	348 kW
Crowd Force		150,000 lbs	68,039 kg
Suspended Weight		5,630 lbs	2,554 kg
ID of Output Shaft		3"	76.2 mm
ID of Rotary Joint		3"	76.2 mm
API Adapters		3", 4"	
Lead Adapters		Up to 54" Leader	



800-248-8498

WWW.AMERICANPILEDRIVING.COM

VISIT US



MOBILE APP
NOW AVAILABLE

