




# APE Model 300-2 Vibratory Driver Extractor

The World's Largest Provider of  
Foundation Construction Equipment

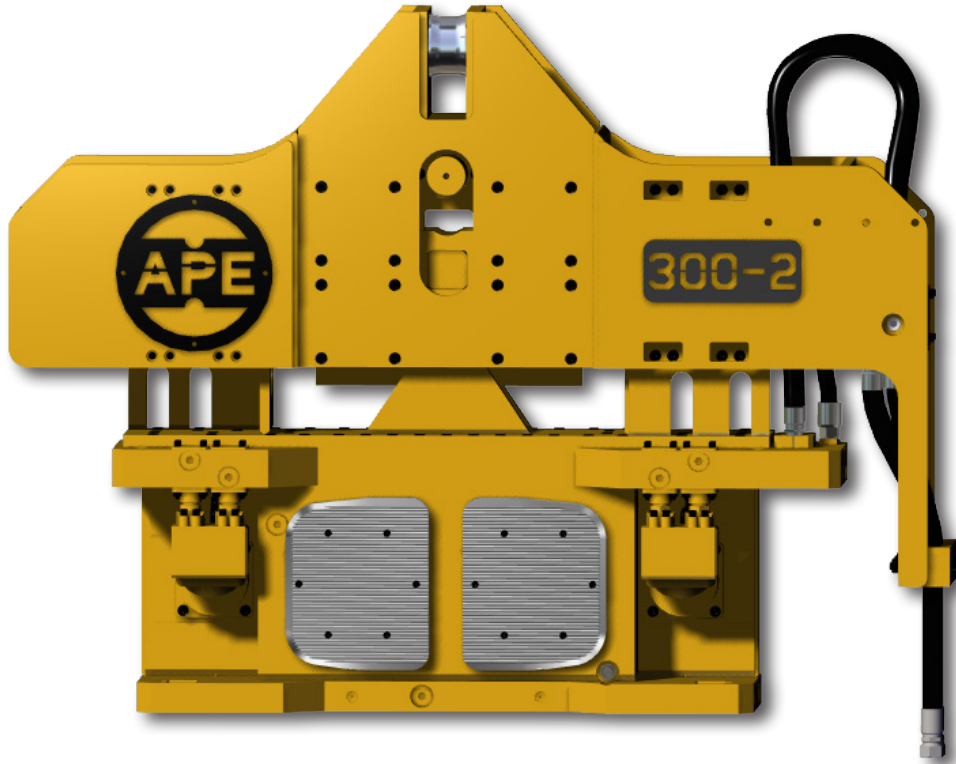

SPECIFICATION	456 POWER UNIT	577 POWER UNIT
<b>Eccentric Moment</b>	2,660 in-lbs (30.64 kgm)	2,660 in-lbs (30.64 kgm)
<b>Drive Force</b>	103 tons (915 kN)	129 tons (1,150 kN)
<b>Frequency Maximum (VPM)</b>	0-1650 vpm	0-1850 vpm
<b>Max Line Pull</b>	129 tons (1,147 kN)	129 tons (1,147 kN)
<b>Bare Hammer Weight w/o Clamp</b>	9,480 lbs (4,300 kg)	9,480 lbs (4,300 kg)
<b>Throat Width</b>	22" (55 cm)	22" (55 cm)
<b>Length</b>	94" (239 cm)	94" (239 cm)
<b>Height w/o Clamp</b>	71.4" (181 cm)	71.4" (181 cm)
<b>Power Unit Engine Type</b>	CAT C9.3B TIER IV / STAGE V DUAL CERTIFIED	CAT C13B TIER IV
<b>Power Unit Horsepower</b>	456 HP (340 kW)	577 HP (430 kW)

*Specifications may vary due to site conditions, specific hammer conditions or product set up.  
Specifications may change without notice.  
Consult the factory for details on any specific product (800) 248-8498.*



WWW.AMERICANPILEDIVING.COM

(800) 248-8498

Ape@americanpiledriving.com