




APE Model 300-6 Vibratory Driver Extractor

The World's Largest Provider of
Foundation Construction Equipment

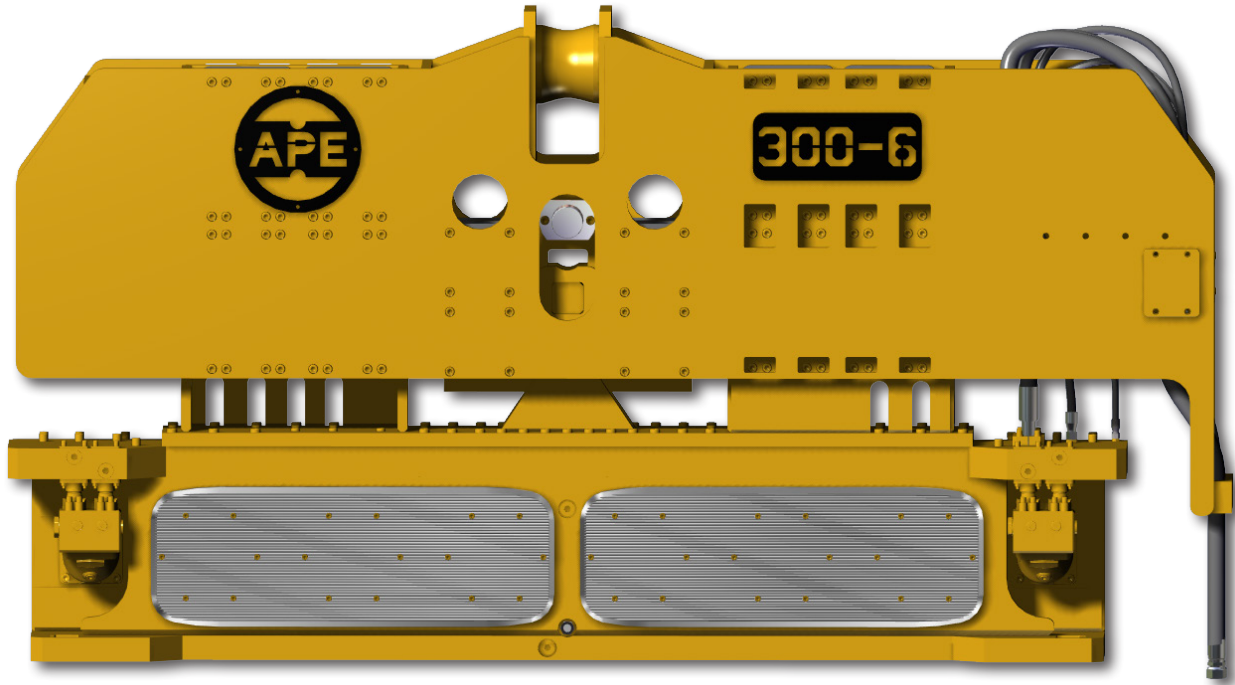

SPECIFICATION	800 POWER UNIT	950 POWER UNIT
Eccentric Moment	7980 in-lbs (91.93 kgm)	7980 in-lbs (91.93 kgm)
Drive Force	309 tons (2744 kN)	388 tons (3,449 kN)
Frequency Maximum (VPM)	0-1650 vpm	0-1850 vpm
Max Line Pull	185 tons (1,645 kN)	185 tons (1,645 kN)
Bare Hammer Weight w/o Clamp	21,200 lbs (9,616 kg)	21,200 lbs (9,616 kg)
Shipping Weight w/ 200' Bundle	25,000 lbs (11,340 kg)	25,000 lbs (11,340 kg)
Throat Width	23" (58 cm)	23" (58 cm)
Length	155" (394 cm)	155" (394 cm)
Height w/o Clamp	82" (207 cm)	82" (207 cm)
Power Unit Engine Type	CAT C18 TIER IV STAGE V DUAL CERTIFIED	CAT C27 TIER IV STAGE V DUAL CERTIFIED
Power Unit Horsepower	800 HP (597 kW)	950 HP (708 kW)

*Specifications may vary due to site conditions, specific hammer conditions or product set up.
Specifications may change without notice.
Consult the factory for details on any specific product (800) 248-8498.*



WWW.AMERICANPILEDRIVING.COM

(800) 248-8498

Ape@americanpiledriving.com