




The J&M Model V216 + 200 Vibratory Driver / Extractor

Engineered for maximum versatility and maximum ownership utilization.

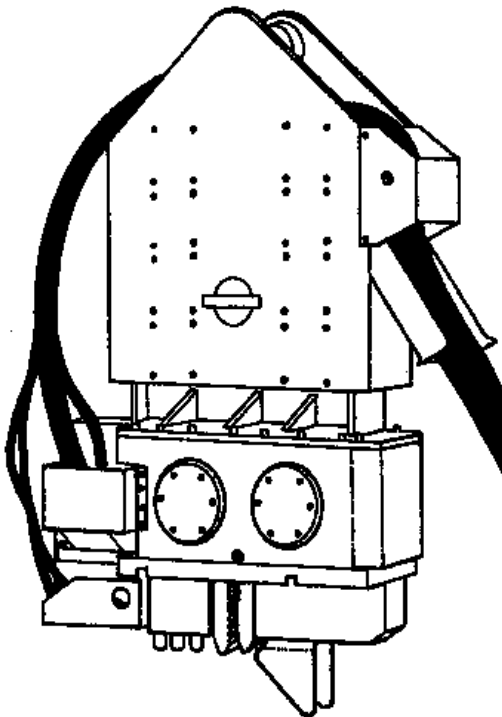

- The most historically popular vibratory driver / extractor ever made
- 1,100 inch/lbs of eccentric moment combined w/ a low-mass transmission provides maximum pile amplitude
- Variable hammer weight available with bias weights as an option. Add 2000 lbs of driving weight for high friction soils
- Super-tough forged gears provide an unmatched 12 year useful life
- 40-ton elastomeric suppressor handles your toughest pulling jobs while providing a high working load safety factor
- Supplied with environment friendly non-toxic biodegradable hydraulic oil
- Remote electric pendant control includes engine speed control for fuel efficiency and emergency engine stop for personnel safety. Duplicate full-function controls on the panel eliminate downtime from accidental damage
- Heavy Duty two-piece clamp minimizes headroom requirements and reduces the suspended weight to improve pile amplitude
- Clamps include internal holding valves for safety and extra-heavy wall cylinders machined from solid blocks to eliminate cylinder guards
- Highest quality Dennison pump & Vickers motor in a time proven reliable open-loop hydraulic system ensures maximum efficiency, maximum reliability, and simpler, quicker unit serviceability
- Optional digital radio remote provides total operator freedom of movement
- Made in the USA by the industries most technologically innovative manufacturer of hydraulic vibratory pile drivers / extractors since 1974

VIBRATOR		POWER UNIT		
Eccentric moment	1,100 inch/lbs (13 kg-m)	Engine	Caterpillar C6.6	
Frequency	1600 vpm	Power	200 HP (149 kW)	
Centrifugal force	40 tons (355 kN)	Operating speed	2150 rpm	
Amplitude (free hanging)	0.94 in (24 mm)	Drive pressure	2,500 psi (172 bar)	
Max line pull for extracting	40 ton (355 kN)	Drive flow	100 gpm (380 lpm)	
Weight (no clamps or hoses)	4,230 lbs (1920 kg)	Clamp pressure	4,300 psi (295 bar)	
Non-vibrating weight	1,900 lbs (860 kg)	Clamp flow	10 gpm (38 lpm)	
Height (without clamp)	61 in (1550 mm)	Weight (w/ full fuel & fluid)	9,600 lbs (4356 kg)	
Length	50 in (1270 mm)	Length	126 in (3200 mm)	
Width	16 in (405 mm)	Width	60 in (1525 mm)	
Throat width	12 in (305 mm)	Height	80 in (2032 mm)	
Hydraulic hose length	100 ft (30 m)	Hydraulic reservoir	280 gal (1058 l)	
Hydraulic hose weight	850 lbs (385 kg)	Fuel capacity	130 gal (490 l)	

HYDRAULIC CLAMPS:	Standard Universal Clamp	Small Diameter Timber Clamp	Casing Clamps w/ 3 ft Beam	Concrete & Small Pipe Timber Clamp
Clamping force	50 tons (445 kN)	25 tons (230 kN)	160 tons (1423 kN)	53 ton (470 kN)
Weight	870 lbs (395 kg)	2,500 lbs (1135 kg)	2650 lbs (1200 kg)	4970 lb (2255 kg)
Length	49 in (1245 mm)	47 in (1195 mm)	62 in (1575 mm)	43 in (1095 mm)
Width	13 in (330 mm)	43 in (1095 mm)	14 in (355 mm)	27 in (685 mm)
Height	18 in (460 mm)	38 in (965 mm)	26 in (660 mm)	79 in (2005 mm)

Corporate Office

7032 S. 196th Street
 Kent, WA 98032
 Phone: 800-248-8498
 Fax: 253-872-8710

<http://www.jandm-usa.com>