


The J&M Model 22-23 Vibratory Driver / Extractor

Engineered for premium performance for smaller cranes

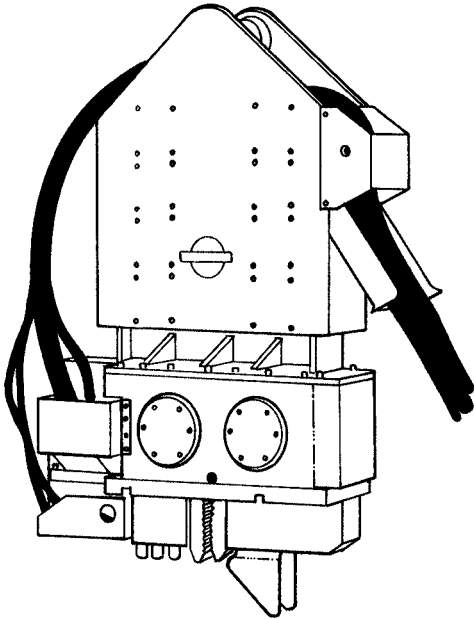

- ◆ The most powerful hammer and highest performer in its weight class.
- ◆ 2,200 in-lbs of precision cast Hi-Den® eccentric moment combined with a low-mass transmission provides the maximum possible pile amplitude.
- ◆ 40-ton maximum elastomeric suppressor handles your toughest pulling jobs while providing the industry's highest working load safety factor.
- ◆ Supplied with environment friendly non-toxic biodegradable hydraulic oil.
- ◆ Remote electric pendant control includes engine speed control for fuel efficiency and emergency engine stop for personnel safety. Duplicate full-function controls on panel eliminate downtime from accidental damage.
- ◆ Heavy-duty two-piece clamp minimizes headroom requirements and reduces the suspended weight to improve pile amplitude and drivability.
- ◆ Highest quality Commercial Intertech pumps and Rexroth motors in time proven reliable open-loop hydraulic system ensure maximum efficiency, maximum reliability and simpler, quicker unit serviceability.
- ◆ Optional digital radio remote provides total operator freedom of movement.
- ◆ Made in the USA by the industry's most technologically innovative manufacturer of hydraulic vibratory pile drivers / extractors since 1974.
- ◆ Clamp includes internal holding valve for safety.

VIBRATOR		POWER UNIT		
Eccentric moment	2,200 in-lbs (25 kg-m)	Engine	Caterpillar 3116TA	
Frequency	1,250 vpm (1250 vpm)	Power	220 HP (164 kW)	
Centrifugal force	49 ton (436 kN)	Operating speed	2,600 rpm (2600 rpm)	
Amplitude (free hanging)	0.98 in (25 mm)	Drive pressure	4,500 psi (310 bar)	
Max line pull for extracting	40 ton (355 kN)	Drive flow	70 gpm (265 lpm)	
Weight (no clamps or hoses)	5680 (2576 kg)	Clamp pressure	4,500 psi (310 bar)	
Non-vibrating weight	2125lb (964 kg)	Clamp flow	10 gpm (38 lpm)	
Height (without clamp)	81.5 in (2070 mm)	Weight (w/ full fluid & fuel)	10,310 lb (4677 kg)	
Length	63 in (1600 mm)	Length	126 in (3200 mm)	
Width	19.44 in (494 mm)	Width	60 in (1525 mm)	
Throat width	15.25 in (387 mm)	Height	76 in (1930 mm)	
Hydraulic hose length	100 ft (30 m)	Hydraulic reservoir	275 gal (1040 l)	
Hydraulic hose weight	850 lbs (385 kg)	Fuel capacity	130 gal (492 l)	

HYDRAULIC CLAMPS:	Standard Universal Clamp	Casing Clamps w/ 3' Beam	Small Diameter Timber Clamp	Concrete, Small Pipe & Timber Clamp
Clamping force	75 ton (445 kN)	160 ton (1425 kN)	25 ton (230 kN)	53 ton (470 kN)
Weight	870 lb (395 kg)	2,650 lb (1200 kg)	2,500 lb (1135 kg)	4,970 lb (2255 kg)
Length	49 in (1245 mm)	62 in (1575 mm)	47 in (1195 mm)	43 in (1095 mm)
Width	13 in (330 mm)	14 in (355 mm)	43 in (1095 mm)	27 in (685 mm)
Height	18 in (460 mm)	26 in (660 mm)	38 in (965 mm)	79 in (2005 mm)



1601 Banksville Road Pittsburgh Pa 15216-3205

PH: 866-462-PART / 412-341-8190 / 412-720-5175

E-Mail: info@jandm-usa.com FAX: 412-341-8192