



US010385531B2

(12) **United States Patent**  
**Suver**

(10) **Patent No.:** **US 10,385,531 B2**

(45) **Date of Patent:** **Aug. 20, 2019**

(54) **SPLIT FLIGHT PILE SYSTEMS AND METHODS**

(71) Applicant: **American Piledriving Equipment, Inc., Kent, WA (US)**

(72) Inventor: **Paul Suver, Kent, WA (US)**

(73) Assignee: **American Piledriving Equipment, Inc., Kent, WA (US)**

(\* ) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

(21) Appl. No.: **15/285,326**

(22) Filed: **Oct. 4, 2016**

(65) **Prior Publication Data**

US 2017/0101759 A1 Apr. 13, 2017

**Related U.S. Application Data**

(60) Provisional application No. 62/239,692, filed on Oct. 9, 2015.

(51) **Int. Cl.**

- E02D 5/56* (2006.01)
- E02D 7/22* (2006.01)
- E02D 7/28* (2006.01)
- E02D 7/06* (2006.01)
- E02D 7/26* (2006.01)
- E02D 27/12* (2006.01)
- E02D 27/50* (2006.01)

(52) **U.S. Cl.**

CPC ..... *E02D 7/28* (2013.01); *E02D 5/56* (2013.01); *E02D 7/06* (2013.01); *E02D 7/22* (2013.01); *E02D 7/26* (2013.01); *E02D 27/12* (2013.01); *E02D 27/50* (2013.01)

(58) **Field of Classification Search**

CPC combination set(s) only.  
See application file for complete search history.

(56) **References Cited**

**U.S. PATENT DOCUMENTS**

- 500,780 A 7/1893 Simon
- 910,421 A 1/1909 Schlueter
- 999,334 A 8/1911 Pearson

(Continued)

**FOREIGN PATENT DOCUMENTS**

- CA 2394894 \* 2/2002
- CA 2942801 A1 10/2015

(Continued)

**OTHER PUBLICATIONS**

USPTO, "Non-Final Office Action, U.S. Appl. No. 15/372,196," dated Oct. 4, 2017, 23 pages.

(Continued)


*Primary Examiner* — Sean D Andrish

(74) *Attorney, Agent, or Firm* — Michael R. Schacht; Schacht Law Office, Inc.

(57) **ABSTRACT**

A pile assembly to be driven into the ground comprises an elongate member, a drive member, and a plurality of flight members. The drive member is supported by the elongate member to facilitate axial rotation of the elongate member. The plurality of flight members is supported by the elongate member. Axial rotation of the elongate member causes the plurality of flight members to auger the elongate member into the ground. The flight members are arranged to balance the loads on the elongate member as the elongate member is driven into the ground.

**9 Claims, 3 Drawing Sheets**

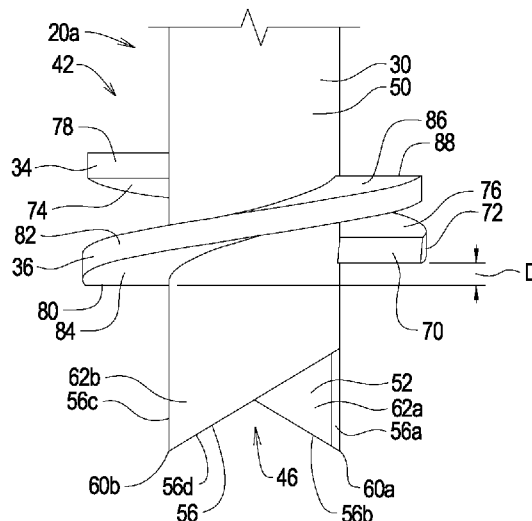

(56)

References Cited

U.S. PATENT DOCUMENTS

1,684,816 A 9/1928 Arden  
 2,101,285 A 12/1937 Stevens  
 2,128,428 A 8/1938 Murray, Jr.  
 2,232,845 A 2/1941 Fieroh  
 3,059,436 A 10/1962 Hermann, Jr.  
 3,175,630 A 3/1965 Hein et al.  
 3,411,305 A 11/1968 Cella  
 3,999,392 A 12/1976 Fukushima et al.  
 4,297,056 A 10/1981 Nottingham  
 4,351,624 A 9/1982 Barber  
 4,519,729 A 5/1985 Clarke et al.  
 4,632,602 A 12/1986 Hovnanian  
 4,650,372 A \* 3/1987 Gorrell ..... E02D 5/56  
 405/232  
 4,768,900 A 9/1988 Burland  
 5,088,565 A 2/1992 Evarts  
 5,106,233 A 4/1992 Breaux  
 5,117,925 A 6/1992 White  
 5,240,348 A 8/1993 Breaux  
 5,244,316 A 9/1993 Wright et al.  
 5,263,544 A 11/1993 White  
 5,355,964 A 10/1994 White  
 5,388,931 A 2/1995 Carlson  
 5,515,655 A 5/1996 Hoffmann  
 5,529,132 A 6/1996 Evarts  
 5,544,979 A 8/1996 White  
 5,609,380 A 3/1997 White  
 5,653,556 A 8/1997 White  
 5,794,716 A 8/1998 White  
 6,039,508 A 3/2000 White  
 6,394,704 B1 \* 5/2002 Sacki ..... E02D 5/56  
 405/231  
 6,427,402 B1 8/2002 White  
 6,431,795 B2 8/2002 White  
 6,442,906 B1 9/2002 Hwang  
 6,447,036 B1 9/2002 White  
 6,543,966 B2 4/2003 White  
 6,557,647 B2 5/2003 White  
 6,641,323 B2 11/2003 Ronsheim  
 6,648,556 B1 11/2003 White  
 6,672,805 B1 1/2004 White  
 6,732,483 B1 5/2004 White  
 6,736,218 B1 5/2004 White  
 6,896,448 B1 5/2005 White  
 6,908,262 B1 6/2005 White  
 6,988,564 B2 1/2006 White  
 7,168,890 B1 1/2007 Evarts  
 7,392,855 B1 7/2008 White  
 7,694,747 B1 4/2010 White  
 7,708,499 B1 5/2010 Evarts et al.  
 7,824,132 B1 11/2010 White

7,854,571 B1 12/2010 Evarts  
 7,914,236 B2 3/2011 Neville  
 7,950,877 B2 5/2011 Evarts  
 8,070,391 B2 12/2011 White  
 8,181,713 B2 5/2012 White  
 8,186,452 B1 5/2012 White et al.  
 8,434,969 B2 5/2013 White  
 8,496,072 B2 7/2013 White  
 8,763,719 B2 7/2014 White  
 8,769,893 B1 7/2014 Gill et al.  
 9,249,551 B1 2/2016 White  
 9,255,375 B2 2/2016 Yingling et al.  
 9,556,581 B2 1/2017 Hale et al.  
 9,556,621 B2 1/2017 Pelc et al.  
 9,631,335 B2 4/2017 Reusing et al.  
 9,957,684 B2 5/2018 Suver et al.  
 2005/0039952 A1 2/2005 Hill et al.  
 2006/0198706 A1 \* 9/2006 Neville ..... E02D 7/22  
 405/252.1  
 2010/0266344 A1 10/2010 Plotkin et al.  
 2010/0303552 A1 12/2010 Yingling et al.  
 2011/0162859 A1 7/2011 White  
 2012/0292062 A1 11/2012 White  
 2013/0149040 A1 6/2013 Evarts  
 2014/0056652 A1 2/2014 Suver  
 2014/0356075 A1 \* 12/2014 Hale ..... E02D 27/16  
 405/230  
 2014/0377011 A1 12/2014 Yingling et al.  
 2015/0016893 A1 1/2015 Suver et al.  
 2016/0356294 A1 12/2016 Fenwick et al.  
 2017/0167102 A1 6/2017 Suver et al.

FOREIGN PATENT DOCUMENTS

CN 102296608 B 7/2015  
 JP 59228529 A 12/1984  
 JP 497015 A 3/1992  
 JP 2005256500 A 9/2005  
 JP 2005315050 A 11/2005  
 JP 2006089933 A 4/2006  
 JP 2006177125 A 7/2006  
 JP 2006312825 A 11/2006  
 JP 2009138487 A 6/2009  
 NO 46428 4/1929  
 RU 2109881 C1 4/1998  
 WO WO 96/00326 \* 1/1996  
 WO 2012031108 A1 3/2012

OTHER PUBLICATIONS

USPTO, "Non-Final Office Action, U.S. Appl. No. 15/174,724," dated Dec. 11, 2018, 18 pages.

\* cited by examiner

FIG. 1

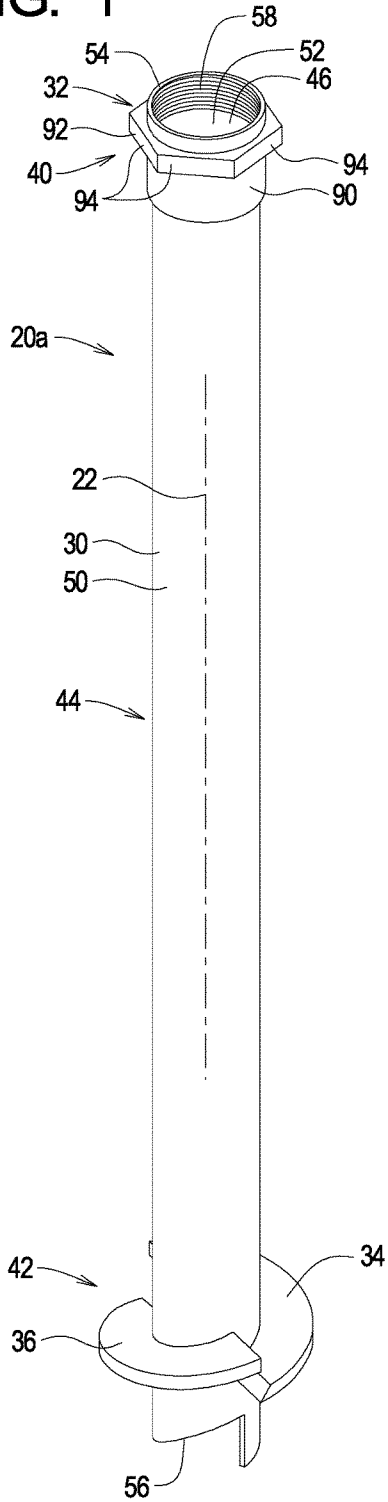


FIG. 2

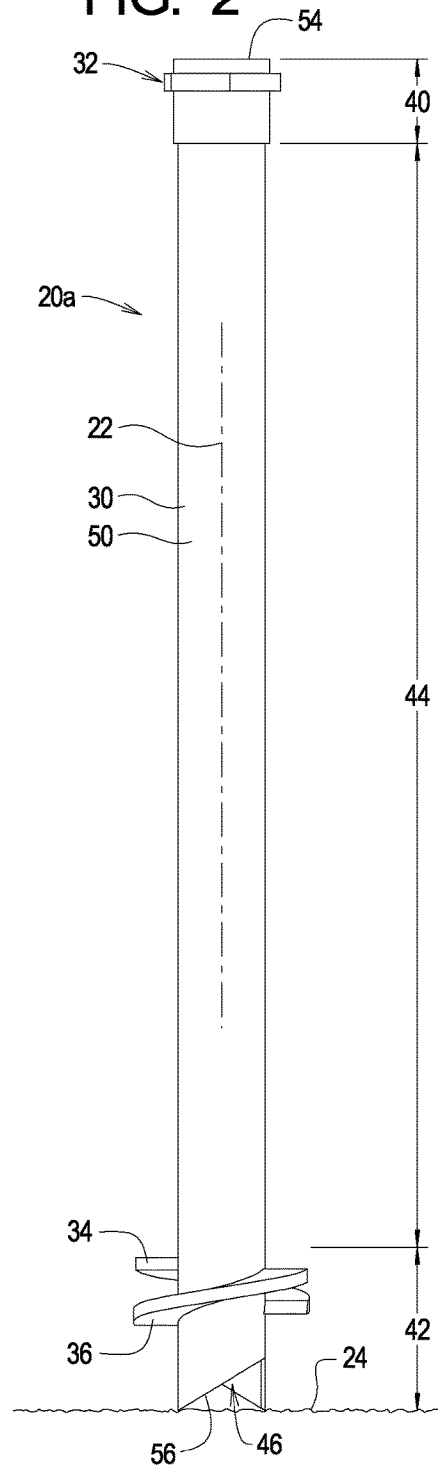


FIG. 3





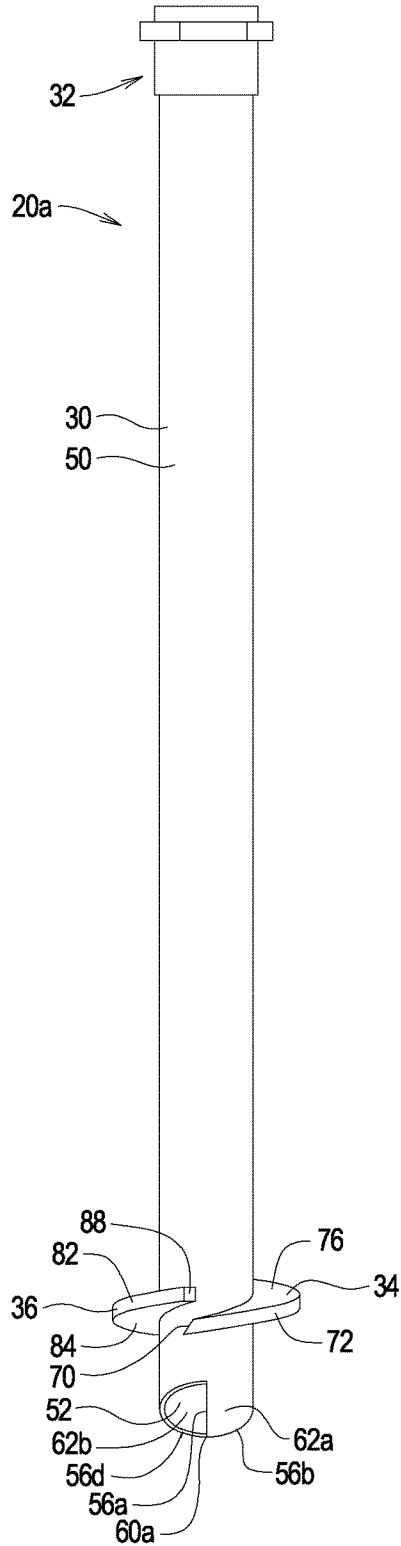


FIG. 4

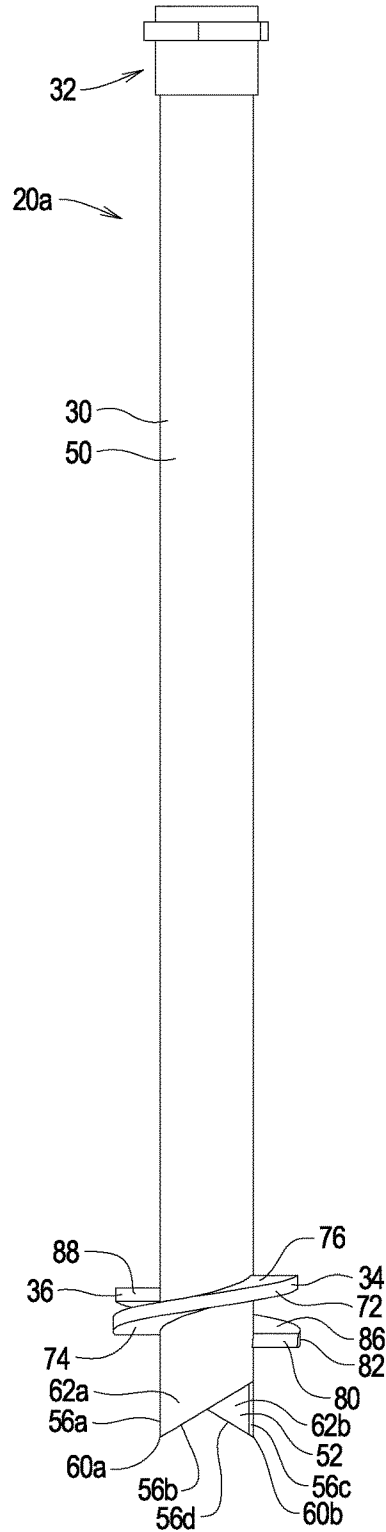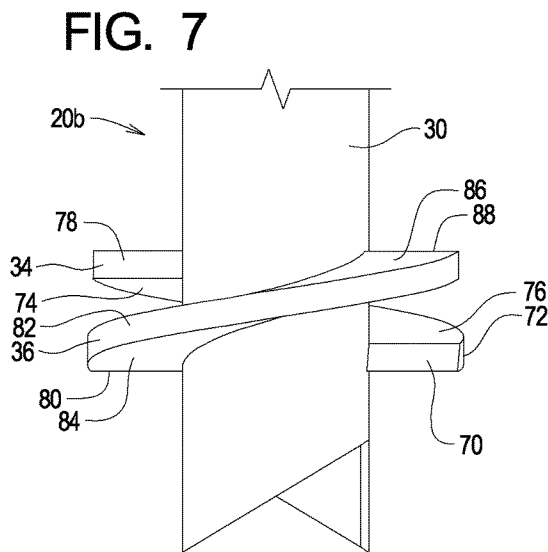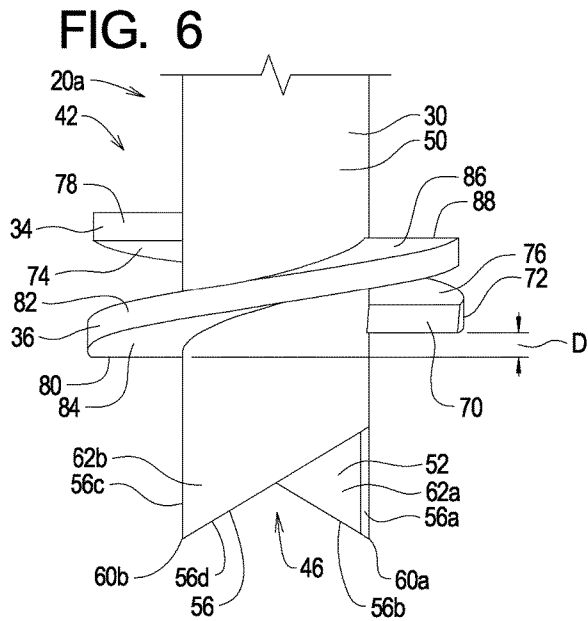

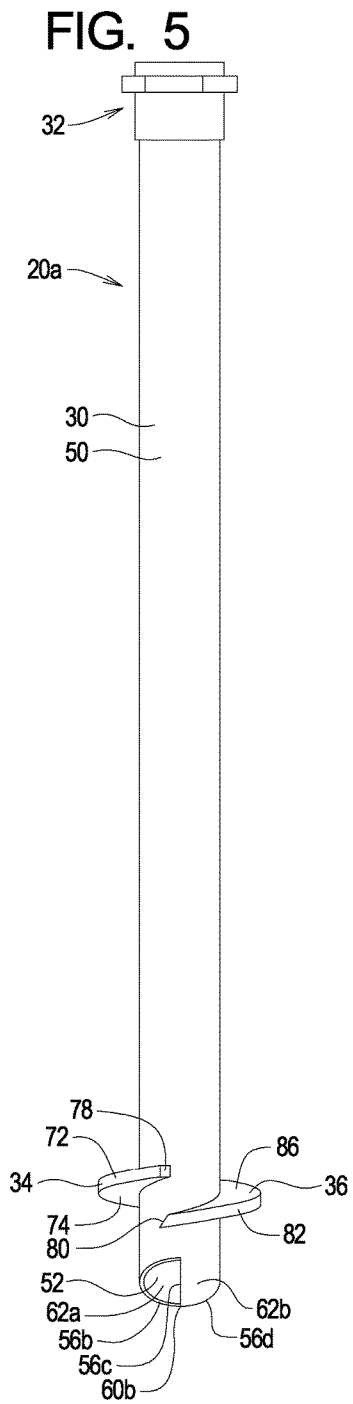

# 1

## SPLIT FLIGHT PILE SYSTEMS AND METHODS

### RELATED APPLICATIONS

This application, U.S. patent application Ser. No. 15/285,326 filed Oct. 4, 2016 claims benefit of U.S. Provisional Application Ser. No. 62/239,692 filed Oct. 9, 2015, the contents of which are incorporated herein by reference.

### TECHNICAL FIELD

The present invention relates to pile systems and methods and, in particular, to pile systems configured to be augered into the ground.

### BACKGROUND

Piles are common driven into the ground to provide support for structures. Depending on the nature of the structure and the nature of ground where structure is to be built, the pile can be configured in a number of different shapes and sizes and can be manufactured of a variety of different materials.

A common pile type is made of cylindrical pipe. Cylindrical pipe piles are relatively expensive and are commonly driven into the ground using a combination of static and vibrational forces. Certain pipe piles are provided with a drive bit to allow the cylindrical pipe pile to be driven into the ground using axial rotation.

The need exists for improved pipe piles that facilitate the insertion of the pile into the ground.

### SUMMARY

The present invention may be embodied as a pile assembly to be driven into the ground comprises an elongate member, a drive member, and a plurality of flight members. The drive member is supported by the elongate member to facilitate axial rotation of the elongate member. The plurality of flight members is supported by the elongate member. Axial rotation of the elongate member causes the plurality of flight members to auger the elongate member into the ground. The flight members are arranged to balance the loads on the elongate member as the elongate member is driven into the ground.

A pile assembly to be driven into the ground comprises an elongate member, a drive member, and a plurality of flight members. The elongate member is hollow and cylindrical elongate member and defines a drive end portion, a driven end portion, and a shaft portion extending between the drive end portion and the driven end portion. The drive member is arranged on the drive end portion of the elongate member to facilitate axial rotation of the elongate member. The plurality of flight members arranged on the driven end portion of the elongate member. Axial rotation of the elongate member causes the plurality of flight members to auger the elongate member into the ground. The flight members are arranged to balance the loads on the elongate member as the elongate member is driven into the ground.

The present invention may also be embodied as a method of driving a pile assembly into the ground comprising the following steps. An elongate member is provided. A drive member is supported on the elongate member. A plurality of flight members is supported on the elongate member. The drive member is engaged to axially rotate the elongate member such that the plurality of flight members auger the

# 2

elongate member into the ground. The flight members are arranged to balance the loads on the elongate member as the elongate member is driven into the ground.

### BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a perspective view of a first example pile assembly of the present invention;

FIG. 2 is a first side elevation view of the first example pile assembly;

FIG. 3 is a second side elevation view of the first example pile assembly rotated 90 degrees from the first side elevation view;

FIG. 4 is a third side elevation view of the first example pile assembly rotated 90 degrees from the second side elevation view;

FIG. 5 is a fourth side elevation view of the first example pile assembly rotated 90 degrees from the third side elevation view;

FIG. 6 is a side elevation view of a portion of FIG. 2 illustrating an offset between first and second flight members of the first example pile assembly; and

FIG. 7 is a partial, side elevation view of a second example pile assembly having no offset between first and second flight members thereof.

### DETAILED DESCRIPTION

Referring initially to FIGS. 1-6 of the drawing, depicted therein is a first example pile assembly 20a constructed in accordance with, and embodying, the principles of the present invention. The first example pile assembly 20a defines a pile axis 22 and is driven into the ground 24 (FIG. 2) with the pile axis 22 at a desired orientation.

The first example pile assembly 20a comprises an elongate member 30, a drive member 32, and first and second flight members 34 and 36. As shown in FIG. 2, the drive member 32 is secured to or integrally formed with a drive end portion 40 of the elongate member 30, while the first and second flight members 34 and 36 are secured to or integrally formed with a driven end portion 42 of the elongate member 30. A shaft portion 44 of the elongate member 30 extends between the drive end portion 40 and the driven end portion 42. The example elongate member 30 is hollow and defines a central chamber 46.

More specifically, the example elongate member 30 is a cylindrical hollow member defining an outer surface 50, an inner surface 52, a drive end surface 54, and a driven end surface 56. A threaded surface portion 58 of the inner surface 52 is formed at the drive end portion 40 of the elongate member 30. The example drive end surface 54 is circular as best shown in FIG. 1. The example driven end surface 56 comprises a first portion 56a, a second portion 56b, a third portion 56c, and a fourth portion 56d. As perhaps best shown by a comparison of FIGS. 2-6, in the example elongate member 30 the first and third portions 56a and 56c of the driven end surface 56 are laterally spaced from and substantially parallel to the pile axis 22. A comparison of FIGS. 2-6 further shows that, in the example elongate member 30, the second and fourth portions 56b and 56d of the driven end surface 56 are laterally spaced from and angled with respect to the pile axis 22.

The intersections of the first and second portions 56a and 56b of the driven end surface 56 defines a first point 60a, while the intersections of the third and fourth portions 56c and 56d of the driven end surface 56 defines a second point 60b. Associated with the first and second points 60a and 60b

are first and second tooth portions **62a** and **62b** of the elongate member **30**. The tooth portions **62a** and **62b** of the elongate member **30** are formed in the driven end portion between the first and second flight members **34** and **36** and the driven end surface **56**.

Referring again to FIGS. 2-6, it can be seen that the example first flight member **34** defines a first lead surface **70**, a first perimeter surface **72**, a first engaging surface **74**, a first rear surface **76**, and a first trailing surface **78**. Similarly, the example second flight member **36** defines a second lead surface **80**, a second perimeter surface **82**, a second engaging surface **84**, a second rear surface **86**, and a second trailing surface **88**. The first and second flight members **34** and **36** are metal plates that are welded to the outer surface **50** of the elongate member **30**.

Referring for a moment back to FIG. 1, it can be seen that the drive member **32** comprises a collar portion **90** and a drive portion **92**. The drive portion **92** defines at least one drive surface **94**. The example drive portion **92** is a hex drive defining six drive surfaces **94**. The drive portion **92** is secured to the collar portion **90** and the collar portion **90** is secured to the drive end portion **40** of the elongate member **30** such that the drive surfaces **94** allow the drive member **32** to be axially rotated about the pile axis **22**.

As is apparent from a comparison of FIGS. 2-6, the example first and second flight members **34** and **36** are symmetrically arranged about a longitudinal reference plane (not shown) defined by the pile axis **22**. In particular, the example first and second flight members **34** and **36** are identical helical structures and are each arranged entirely on opposite sides of the reference plane. The example flight members **34** and **36** are semi helical or partially helical in that they extend only partly around the circumference of the example cylindrical elongate member **30**. In the example pile assembly **20a**, the example flight members **34** and **36** each extend approximately 180 degrees around the circumference of the example elongate member **30**. Further, FIG. 6 illustrates that the example first and second flight members **34** and **36** are offset from each other along the pile axis by a distance **D**.

The flight members **34** and **36** also need not be identical. Further, the flight members **34** and **36** may each extend less or more than 180 degrees around the circumference of the elongate member **30**. Further, while two flight members **34** and **36** are used in the example pile assembly **20a**, more than two flight members may be used.

Further, a second example pile assembly **20b** is shown in FIG. 7. The second example pile system **20b** is in all most similar to the first example pile assembly **20a** and will be described herein only to the extent that the two pile assemblies differ. In particular, FIG. 7 illustrates that, in the second example pile system **20b**, the flight members **34** and **36** are not offset from each other.

In use, the pile assembly **20a** or **20b** is supported with the driven end portion **42** in contact with the ground **24** and the drive end portion **40** arranged such that the pile axis **22** is at a desired angular relationship with vertical and/or horizontal. The driven end portion **42** is then axially rotated (typically by engaging the drive member **32**) such that the tooth portions **62a** and **62b** initiate insertion of the pile assembly **20a** or **20b** into the ground **24**. After a few turns, the first lead surface **70** and then the second lead surface **80** engage the ground **24**. Continued axial rotation of the elongate member **30** causes the first and second flight members **34** and **36** to auger the pile assembly **20a** or **20b** into the ground **24**. FIGS. 3 and 5 illustrate that the lead surfaces **70** and **80** may be

angled with respect to the pile axis **22** to enhance the ability of the lead surfaces **70** and **80** to cut into the ground **24**.

The use of two or more flight members such as the flight members **34** and **36** balances the loads on the elongate member **30** created by the engagement of the flight members **34** and **36** with the ground **24** as the pile assembly **20a** or **20b** is being augered into the ground **24**. The desired angular relationship between vertical and/or horizontal is more easily maintained with the balanced forces created by the example first and second flight members **34** and **36**. Again, different shapes, numbers, and arrangements of flight members may be used to obtain a balanced force as the pile assembly **20a** or **20b** is being augered into the ground **24** until the drive member **32** is at or near a surface of the ground **24**.

Optionally, after the pile assembly **20a** or **20b** is driven to a point at which the drive member **32** is at or near a surface of the ground **24**, an extension pile member (not shown) may be connected to the pile assembly **20a** or **20b** to allow further driving of the pile assembly **20a** or **20b**. An extension pile member is similar to the pile assembly **20a** or **20b** except that the outer surface thereof at the driven end is externally threaded to engage with the threaded surface portion **58**. With the external threaded surface of the extension pile member engaged with the threaded surface portion **58**, rotation of the extension pile member causes the threaded portions to engage to join the extension pile member to the pile assembly **20a** or **20b**. Continued rotation of the extension pile member causes rotation of the pile assembly **20a** or **20b** and further drives the pile assembly **20a** or **20b** into the ground **24** such that the drive member **32** is below the surface of the ground **24**. Additional extension pile members may be used to form a pile string extending a desired target depth.

What is claimed is:

1. A pile assembly to be driven into the ground comprising:
  - a cylindrical hollow elongate member defining a driven end portion and a pile axis, where
    - the pile axis is aligned with a longitudinal axis of the elongate member,
    - the driven end portion defines a driven end surface, and the driven end surface defines a plurality of first portions angled relative to the pile axis, a plurality of second portions angled relative to the pile axis, and a point defined at an intersection of each of the first and second portions such that a plurality of one tooth portions is integrally formed by the elongate member;
    - a drive member supported by the elongate member to facilitate axial rotation of the elongate member; and
    - a plurality of flight members each defining a lead surface and a trailing surface, where the lead surfaces are angled with respect to the pile axis; whereby
      - the plurality of flight members are substantially helical and are supported by the driven end portion of the elongate member such that
        - each of the plurality of flight members extends from the driven end portion of the elongate member through a different angular portion, where the different angular portions extend substantially the same distance around the circumference of the elongate member and the different angular portions total approximately 360 degrees,
        - the plurality of flight members are symmetrically supported on the elongate member such that the lead surface of each flight member is at substantially the

## 5

same angular location as the trailing surface adjacent thereto and the trailing surface of each flight member is at substantially the same angular location as the lead surface adjacent thereto,

each of the plurality of flight members is spaced from the driven end surface of the elongate member, and each of the plurality of flight members is spaced from at least one other flight member such that at least one of the plurality of flight members is offset from at least one of the flight members along the pile axis; axial rotation of the elongate member causes the at least one tooth portion defined by the driven end surface to engage the ground,

after the driven end surface engages the ground, the lead surface closest to the tooth portions cuts into the ground,

after the lead surface closest to the tooth portions cuts into the ground, another lead surface cuts into the ground, and

the plurality of flight members engage the ground to auger the elongate member into the ground; and the flight members engage the ground to balance loads on the elongate member as the elongate member is rotated to auger the elongate member into the ground.

2. A pile assembly as recited in claim 1, in which the plurality of flight members comprises first and second flight members; the first flight member extends around the driven end portion of the elongate member through an angle of approximately 180 degrees; and the second flight member extends around the driven end portion of the elongate member through an angle of approximately 180 degrees.

3. A pile assembly as recited in claim 1, in which: the first portions of the driven end surface are substantially parallel to the pile axis; and the second portion of the driven end surface are angled relative to the pile axis.

4. A pile assembly to be driven into the ground comprising:

a hollow, cylindrical elongate member defining a pile axis, a drive end portion, a driven end portion, and a shaft portion extending between the drive end portion and the driven end portion, where the pile axis is aligned with a longitudinal axis of the elongate member, and

the driven end portion defines a driven end surface that is substantially cylindrical and defines a plurality of first portions angled relative to the pile axis, at least a plurality of second portions angled relative to the pile axis, and a point defined at an intersection of the first and second portions such that a plurality of tooth portions is integrally formed by the elongate member;

a drive member arranged on the drive end portion of the elongate member to facilitate axial rotation of the elongate member; and

a plurality of flight members each defining a lead surface and a trailing surface, where the lead surfaces are angled with respect to the pile axis; whereby the plurality of flight members are substantially helical and are supported by the driven end portion of the elongate member such that

each of the plurality of flight members extends around the driven end portion of the elongate member through a different angular portion, where the different angular portions extend substantially the same distance around the circumference of the elongate

## 6

member and the different angular portions total approximately 360 degrees,

the plurality of flight members are symmetrically supported on the elongate member such that the lead surface of each flight member is at substantially the same angular location as the trailing surface adjacent thereto and the trailing surface of each flight member is at substantially the same angular location as the lead surface adjacent thereto, and

each of the plurality of flight members is spaced from at least one other flight member such that at least one of the plurality of flight members is offset from at least one of the flight members along the pile axis; axial rotation of the elongate member causes the at least one tooth portion defined by the driven end surface to engage the ground, and

after the driven end surface penetrates the ground, the lead surface closest to the tooth portions cuts into the ground,

after the lead surface closest to the tooth portions cuts into the ground, another lead surface cuts into the ground, and

the plurality of flight members engage the ground to auger the elongate member into the ground; and the plurality of flight members engage the ground to balance the loads on the elongate member as the elongate member is rotated to auger the elongate member into the ground.

5. A pile assembly as recited in claim 4, in which: the plurality of flight members comprises first and second flight members; the first flight member extends around the drive end portion of the elongate member through an angle of approximately 180 degrees; and the second flight member extends around the driven end portion of the elongate member through an angle of approximately 180 degrees.

6. A pile assembly as recited in claim 4, in which: the first portions of the driven end surface are substantially parallel to the pile axis; and the second portions of the driven end surface are angled relative to the pile axis.

7. A method of driving a pile assembly into the ground comprising the steps of:

providing a cylindrical hollow elongate member defining a driven end portion and a pile axis, where the pile axis is aligned with a longitudinal axis of the elongate member,

the driven end portion defines a driven end surface, and the driven end surface defines a plurality of first portions angled relative to the pile axis, portions angled extending at a second angle relative to the pile axis, and a point defined at an intersection of each of the first and second portions such that a plurality of tooth portions is integrally formed by the elongate member;

supporting a drive member on the elongate member;

providing a plurality of substantially helical flight members each defining a lead surface and a trailing surface, where the lead surfaces are angled with respect to the pile axis;

supporting the plurality of flight members on the driven end portion of the elongate member such that each of the plurality of flight members extends around the driven end portion of the elongate member a different angular portion, where the different angular portions extend substantially the same distance



7

around the circumference of the elongate member and the different angular portions total approximately 360 degrees,

the plurality of flight members are symmetrically supported on the elongate member such that the lead surface of each flight member is at substantially the same angular location as the trailing surface adjacent thereto and the trailing surface of each flight member is at substantially the same angular location as the lead surface adjacent thereto,

each of the plurality of flight members is spaced from the driven end surface of the elongate member, and each of the plurality of flight members is spaced from at least one other flight member such that at least one of the plurality of flight members is offset from at least one of the flight members along the pile axis; and

engaging the drive member to axially rotate the elongate member such that

the at least one tooth portion defined by the driven end surface to engage the ground, and

after the driven end surface engages the ground, the lead surface closest to the tooth portions cuts into the ground,

after the lead surface closest to the tooth portions cuts into the ground, another lead surface cuts into the ground, and

8

the plurality of flight members engage the ground to auger the elongate member into the ground; wherein the plurality of flight members engage the ground to balance loads on the elongate member as the elongate member is rotated to auger the elongate member into the ground.

8. A method as recited in claim 7, in which:

the step of providing a plurality of substantially helical flight members comprises

the step of providing first and second flight members such that

the first flight member extends around the driven end portion of the elongate member through an angle of approximately 180 degrees; and

the second flight member extends around the drive end portion of the elongate member through an angle of approximately 180 degrees.

9. A method as recited in claim 7, in which the step of providing the cylindrical hollow elongate member comprises the steps of:

forming the first portions of the driven end surface such that the first portions are substantially parallel to the pile axis; and

forming the second portions of the driven end surface such that the second portions are angled relative to the pile axis.

\* \* \* \* \*